


# **WMP**

VIDEO MOUNT PRODUCTS

*Instruction Sheet For:*

## **LCD-2537 & LCD-2537B**


---

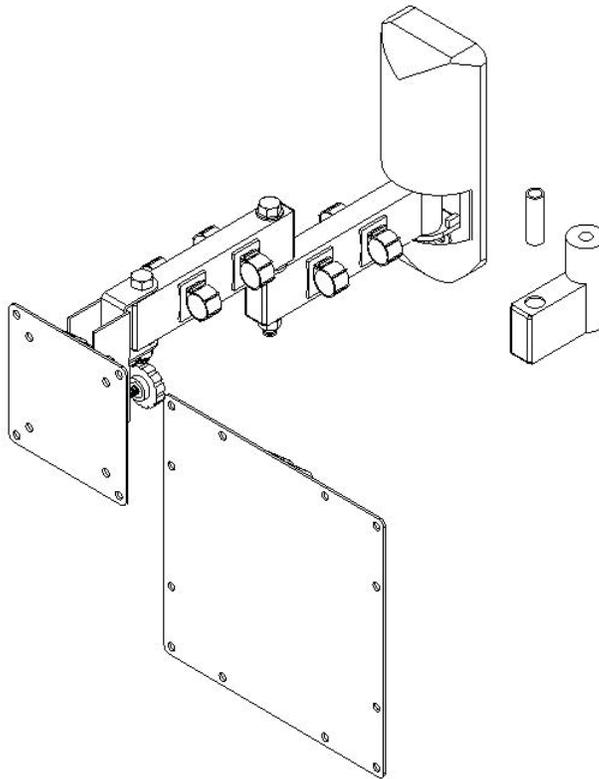


---

*For more information, please contact us at:*  
345 Log Canoe Circle, Stevensville, Maryland 21666  
Toll Free: 877.281.2169 Phone: 410.643.6390 Fax: 410.643.6615  
[www.videomount.com](http://www.videomount.com)


# LCD-2537

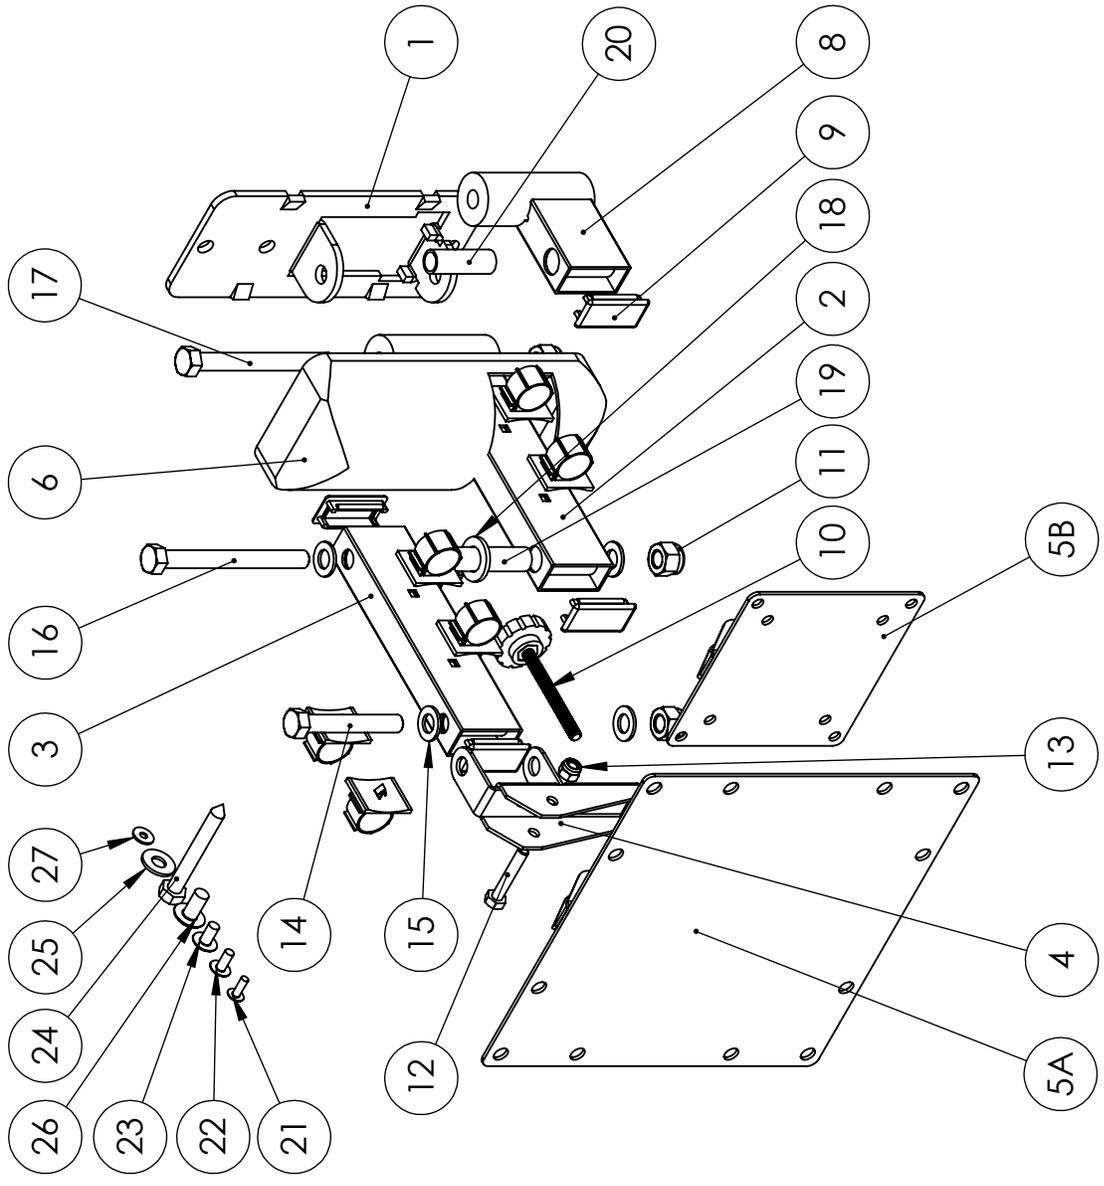


ITEM NO.	DESCRIPTION	Qty
1	Wall Plate	1
2	Rear Force Arm	1
3	Forward Force Arm	1
4	Pivot Bracket	1
5A	Large Mounting Plate	1
5B	Small Mounting Plate	1
6	Plastic Cover	1
7	Cable Clip	8
8	Stub Arm	1
9	End Plug 40*20	4
10	Adjustable Screw 1/4"-20UNC	1
11	Nylon Nut 3/8"*16UNC	3
12	Hex Screw M6*P1.0*L35	1
13	Nylon Nut M6*P1.0	1
14	Hex Screw 3/8"-16UNC*L2.5"	1
15	Washer $\phi$ 10.2* $\phi$ 19*T1.6	4
16	Metal Pin	1
17	Hex Screw 3/8"-16UNC*L90mm	1
18	Washer $\phi$ 13.5* $\phi$ 20*T2.0	1
19	Spacer $\phi$ 13* $\phi$ 9.8*L72	1
20	Spacer $\phi$ 13* $\phi$ 9.8*L38.5	1
21	Screw M4*P0.7*L12	4
22	Screw M5*P0.8*L12	4
23	Screw M6*P1.0*L12	4
24	Lag Screw 5/16"*L2.5"	3
25	Washer $\phi$ 8.3* $\phi$ 19*T1.6	3
26	Screw M8*P1.25*L16	4
27	Washer $\phi$ 4.3* $\phi$ 12*T1.0	4

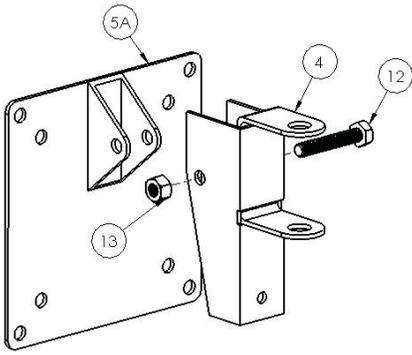

Step 2: Attaching the mounting plate to the pivot bracket (Mounting Plate A (#5A) shown)

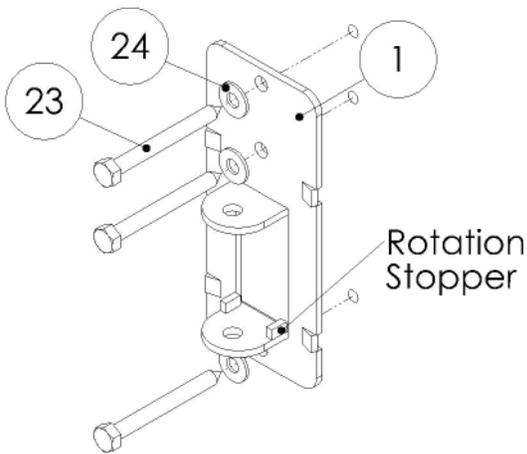

Step 3: Attaching the wall plate to the mounting surface

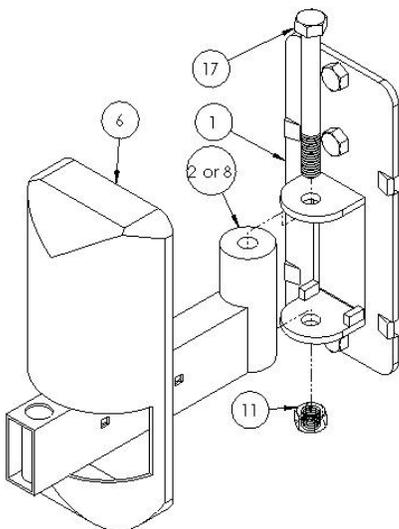

Step 4: Attaching the rear force arm to the wall plate

### Step 1

Before starting, lay out all parts to your mount and match them to the parts list provided. Verify that you have all your parts before attempting to assemble the mount.

### Step 2


Determine which VESA standard plate you will be using (5A) or (5B) (75mm/100mm for (5A) or 200mm/100mmx200mm for (5B) and attach the selected mounting plate (5A) or (5B) to the swivel bracket (4) using the M6 screw (12) and the nylon nut (13). (Set this assembly safely to the side for now.)

### Step 3

Mark the wall or desired mounting surface in preparation of installation of wall mounting plate (1). If mounting to wooden studs, pre drill pilot holes using a 7/32" drill bit. Attach the wall plate (1) to the wooden stud using the 5/16" by 2.5" long lag screw (23) and washer (24) making sure the small rotation stoppers on the wall plate are towards the bottom. **WARNING: Please verify that your mounting surface will support the combined weight of your mount, mounting hardware, and flat panel. Also verify that the mounting surface is safe to drill through. Please note only mounting hardware for mounting to wooden studs will be provided with the unit. If mounting to a surface other than wooden studs then other hardware will be required. If in doubt or uncertain about any of the above, please contact a professional installer.**

### Step 4

Determine which arm configuration you desire (double arm, single arm, or near flush) and locate the correct arms. ((8) for near flush, (2) for single arm, and (2) and (3) for double arm.) Attach the desired wall arm (2) or (8) to the wall plate (1) using the 3/8" screw (17), and nylon nut (11). Snap the plastic cover (6) onto the wall plate (1).

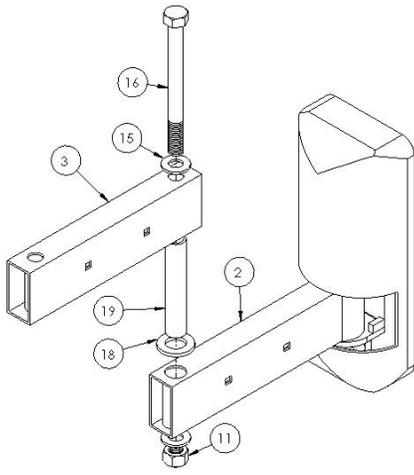


Step 5: Attaching the front force arm to the rear force arm

### Step 5

If your application calls for the double arm configuration, attach the front force arm (3) to the rear force arm (2) using the metal pin (16), the long spacer (19), washers (15) on the top and bottom and (18) between the two arms), and the nylon nut (11). If your application calls for the single arm or near flush mount configuration insert the short spacer (20) into (2) or (8) and continue to the next step.

### Step 6

Attach the swivel bracket assembly from step 2 to the appropriate force arm (2), (3), or (8) depending on your application using a 3/8" screw (14), washers (15), and nylon nut (11). Insert adjustable screw (10) into the back of the swivel bracket (4) for use when tilting the monitor.

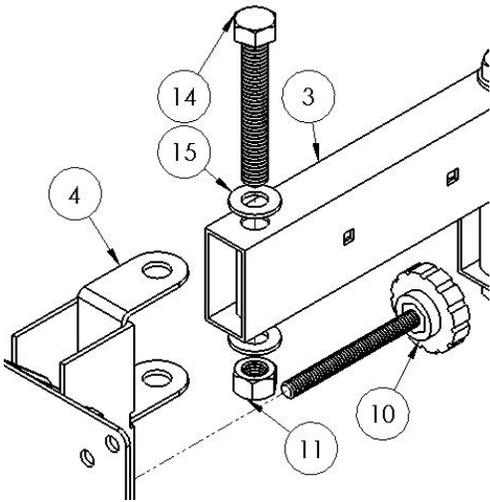

Step 6: Attaching the pivot bracket to the front force arm


### Step 7

Attach the mounting plate assembly from step 2 to your flat panel using the M4 (21), M5 (22), M6 (23) or M8 (26) screws as appropriate. NOTE: If you are using M4 screws with the Large Mounting Plate (5B) then you have to use the small washers (27) provided with the M4 screws (21).

### Step 8

Insert end plugs (9) into the force arms. For cable management, insert the cable clips (7) by pushing the arrow ends into the square holes in the force arms.

*Please verify that all nuts and screws are securely tightened.*

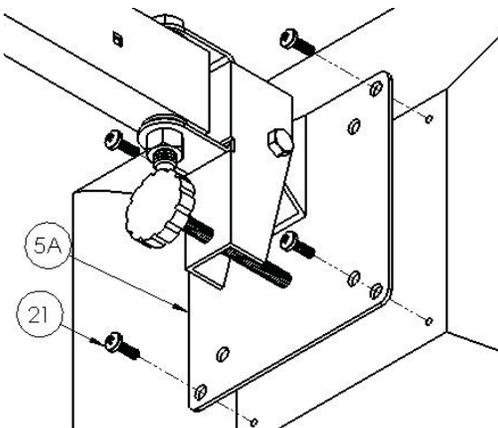

Step 7: Attaching the flat panel to the mounting plate (M4 Screws (#21) shown)



**Enjoy Your Mount!**

**WARNING:** The installer of these products must verify that the mounting surface, ceiling or wall, will safely support the combined weight of all attached equipment and hardware. Video Mount Products will not be held liable for the improper use or installation of its products.